


ZU820T

Ultra bright professional laser projector



- 8800 lumen DuraCore laser projector Ultra bright for immersive installations
- Full motorized lens shift Ideal for a simple set-up
- Large zoom range Motorized zoom expands placement opportunities
- Long life Delivers 30,000 hours of virtually maintenance-free operation

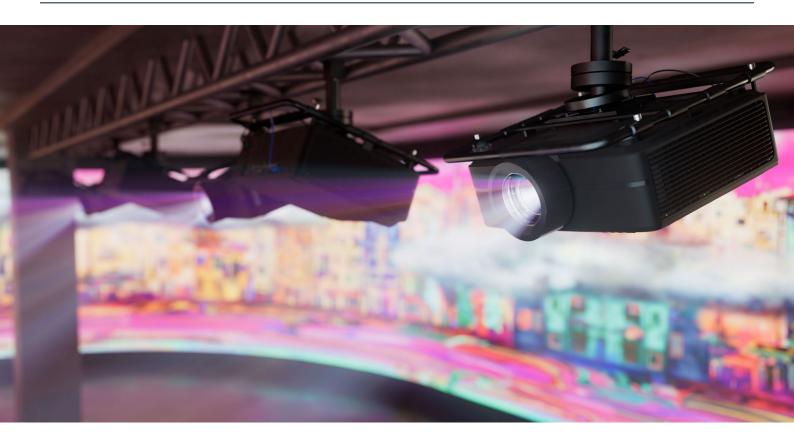

At 8800 lumens with 4K and HDR compatibility, the ZU820T features a dust-resistant IP5X certified optical engine for 24/7 operation capabilities, offering true maintenance-free projection for up to 30,000 hours of powerful performance in Eco mode. Other features include motorized zoom and focus, full motorized lens shift and built-in dual 10W speakers.

High brightness, color precision and quiet operation, alongside a 1.6x zoom make this projector the ideal solution for a variety of end-user scenarios and professional environments, such as simulation, edge-blending and projection mapping, and immersive installations.

Specifications

UPC: 796435 44 601 7, EAN: 5055387666245, Colour: Black	
Display technology	DLP
Resolution	WUXGA (1920x1200)
Brightness	8,800 lumens
ANSI brightness	7,400
Contrast ratio	3,000,000:1
Contrast ratio - full on/off	1,100:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction -	30°
horizontal	
Keystone correction - vertical	30°
Uniformity	95%
Screen size	50" ~ 300" diagonal
Lamp info	
Light source type	DuraCore Laser
LASER life	30,000 hours
Optical	·
Throw ratio	1.25:1 ~ 2:1
Projection distance	31.5" - 846.46"
Zoom	1.6
Zoom type	Motorised
Focal length (mm)	18.72~29.59
Lens shift	Vertical: +/-55%, Horizontal: +/-25%
Lens shift	Yes - {{downloads_link}}
Connectivity	TOO ((downloads_link))
Connections	Innute 1 v UDBoooT 1 v UDMI 2 0 1 v UDMI 1 4c 2D
	Inputs 1 x HDBaseT, 1 x HDMI 2.0, 1 x HDMI 1.4a 3D support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm
	Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A,
	1 x Audio 3.5mm
	Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x
	RS232
LAN - wireless networking	No
General	140
Noise level (typical)	34dB
Noise level (max)	36dB
3D	Full 3D
Security	Security bar, Kensington Lock
OSD / display languages	10 languages: English, French, German, Italian, Portuguese,
OSD / display languages	Russian, Chinese (simplified), Spanish, Chinese (traditional)
24/7 operation	Yes
360° operation	Yes
Remote control	Backlit ProAV remote
Speaker count	2
Watts per speaker	10W
Networking	I V V V
LAN - wireless networking	No
LAN - wireless networking	Yes
	100
Power Supply	AC 90 – 264V 50/60 Hz with PFC input

0.5W

260W

520W

38.58 lbs

30.86 lbs

19.13" x 17.03" x 6.93"

Power consumption (standby)
Power consumption (min)

Power consumption (max)

Dimensions (W x D x H)

Gross weight Net weight

Weight and dimensions





