


INSTALLATION

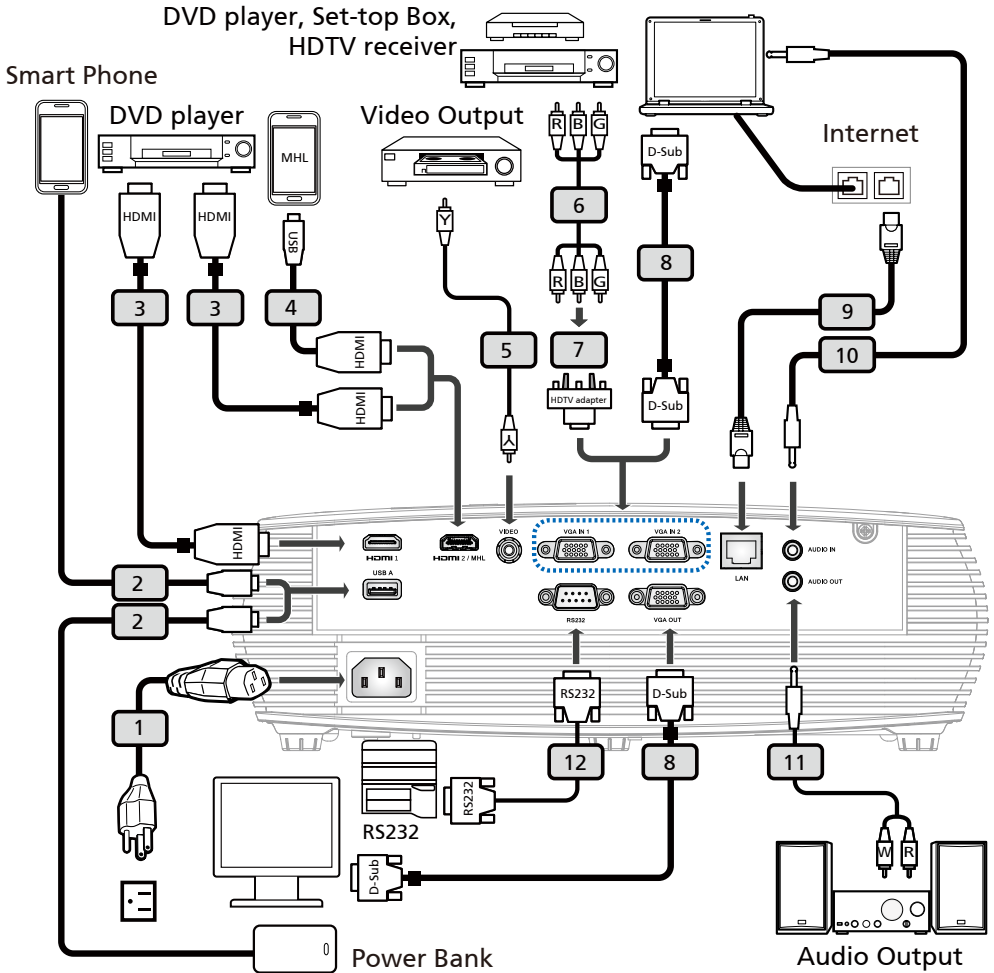

Scan to get user's manual

HDMI[®]
HIGH-DEFINITION MULTIMEDIA INTERFACE

EAC


UA.TR.060



36.7AH02H001-A
P/N:MC.JPH11.003

SPECIFICATIONS

Projection system	DLP®
Resolution	<ul style="list-style-type: none"> • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1024x768 XGA resolution • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1280x800 WXGA resolution • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1920x1080 1080p resolution • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1920x1200 WUXGA resolution resolution
Computer compatibility	IBM PC and compatibles, Apple Macintosh, iMac and VESA standards: SXGA, XGA, VGA, SVGA, SXGA+, WXGA, WXGA+, WSXGA+
Video compatibility	NTSC (3.58/4.43), PAL (B/D/G/H/I/M/N), SECAM (B/D/G/K/L), HDTV (720p, 1080i, 1080p), EDTV (480p, 576p), SDTV (480i, 576i)
Aspect ratio	Auto, Full, 4:3, 16:9, L.Box
Displayable colors	1.07 billion colors
Optical zoom ratio	1.3X
Throw ratio	<ul style="list-style-type: none"> • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1.49 ~ 1.93 (66" @2m) • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1.19 ~ 1.54 (78" @2m) • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1.13 ~ 1.47 (80" @2m) • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1.13 ~ 1.47 (82" @2m)
Projection lens	F = 2.50 ~ 2.78, f = 16.91mm ~ 21.60mm, Manual Zoom & Focus
Projection screen size (diagonal)	<ul style="list-style-type: none"> • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 25" ~ 300" (65cm ~ 762cm) • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 30" ~ 300" (76cm ~ 762cm) • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 31" ~ 300" (78cm ~ 762cm) • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 32" ~ 300" (80cm ~ 762cm)
Projection distance	<ul style="list-style-type: none"> • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1.0m ~ 9.1m (3.3' ~ 29.7') • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1.0m ~ 7.7m (3.3' ~ 25.2') • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1.0m ~ 7.5m (3.3' ~ 24.6') • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1.0m ~ 7.3m (3.3' ~ 24.0')
Horizontal scan rate	15 - 100 kHz
Vertical refresh scan rate	24 - 120 Hz
Lamp type	240W user-replaceable lamp
Keystone correction	±20 degrees
Audio	Internal speaker with 16W x 1 output
Weight	2.65 Kg (5.8 lbs)
Dimensions (W x D x H)	315 mm X 214 mm X 98 mm (12.4" x 8.4" x 3.8")
Digital Zoom	2x
Power supply	AC input 100 - 240 V auto-switching power supply

Power consumption	Normal mode: 290W ± 10% @ 110VAC ECO mode: 205W ± 10% @ 110VAC Standby mode < 0.5W Network standby mode: <3W
Operating temperature	0°C to 40°C / 32°F to 104°F
Standard package contents	<ul style="list-style-type: none"> • AC power cord x1 • Remote control x1 • Security card x1 • AAA battery x2 (for remote control) (option) • User's guide (Projector)(CD-ROM) x1 • Quick start guide (Projector) x1 • User's guide (Media/Wireless function) (CD-ROM) x1 • Quick start guide (Media/Wireless function) x1 • VGA cable x1 (option) • HDMI cable x1 (option) • Carrying case x1 (option)
I/O connectors	<ul style="list-style-type: none"> • Power socket x1 • VGA IN x2 • HDMI x1 • HDMI2/MHL x1 • RJ45 LAN input x1 • VGA output x1 • RS232 x1 • 3.5 mm audio jack input x1 • 3.5 mm audio jack output x1 • Composite video x1

Note:

- The specifications listed above are subject to change without notice.
- Find manuals and other documents for your Acer product on the official Acer support website.

Consumo de Energia

En Operation: 307.05 Wh (307,05 Wh)

En modo de espera: 0.41 Wh (0,41 Wh)