



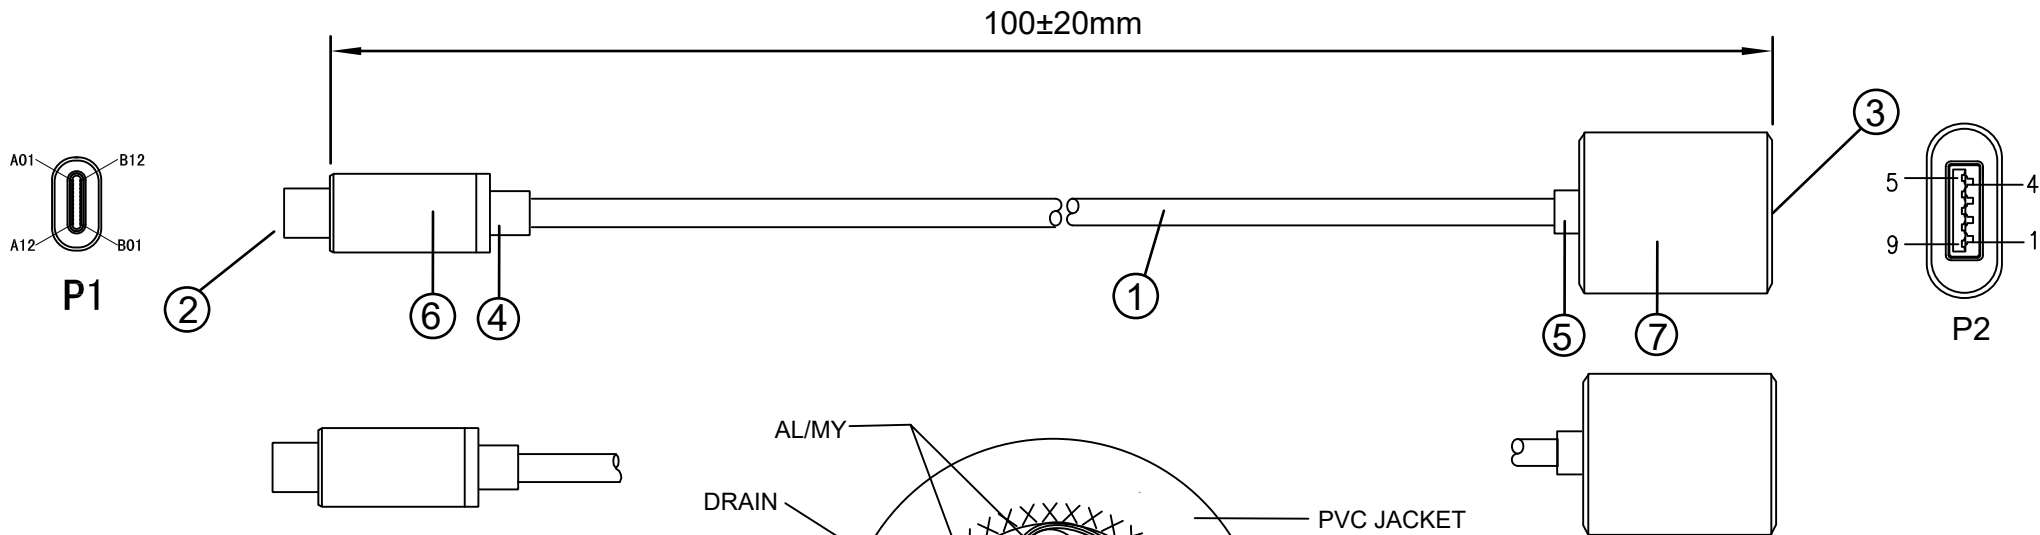

### PIN ASSIGNMENT:

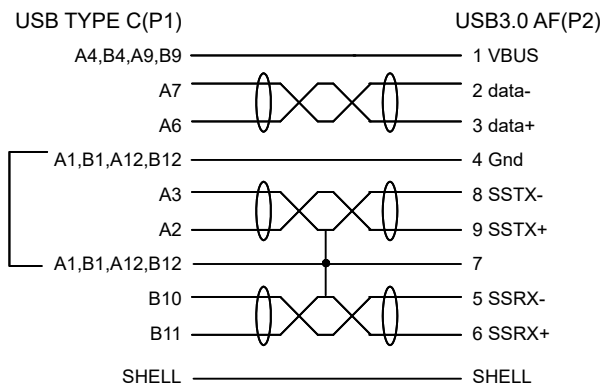

### NOTES:

1. TESTING :100% OPEN AND SHORT TEST.
2. ALL MATERIALS ARE ROHS COMPLIANT

| ⑦   | SHELL           | 1PCS | GRAY ALUMINIUM SHELL                                                                         |
|-----|-----------------|------|----------------------------------------------------------------------------------------------|
| ⑥   | SHELL           | 1PCS | GRAY ALUMINIUM SHELL                                                                         |
| ⑤   | HOOD MOLD       | 1PCS | GRAY PVC                                                                                     |
| ④   | HOOD MOLD       | 1PCS | GRAY PVC                                                                                     |
| ③   | USB3.0 A F      | 1PCS | NICKEL PLATED SHELL                                                                          |
| ②   | USB3.1 TYPE C M | 1PCS | NICKEL PLATED SHELL                                                                          |
| ①   | CABLE           | 1PCS | (32AWG*1P+D+FAM)*2C+32AWG*1P+24AWG*2C+AEB<br>OD:4.5±0.2mm GRAY PVC JACKET GRAY TEXTILE BRAID |
| NO. | PARTS NAME      | Q'TY | SPECIFICATION                                                                                |

| APPROVED | CHECKED | DRAWN | CUSTOMER |           |
|----------|---------|-------|----------|-----------|
|          |         |       | ITEM NO. | USBC-1279 |
|          |         |       | REV.     | 00        |
|          |         |       | UNIT     | mm        |
|          |         |       | SCALE    | NONE      |

### DESCRIPTION:

USB 3.1 GEN 1 3A ADAPTER CABLE  
USB 3.1 TYPE C MALE / USB 3.0 A FEMALE

