





Genuine Touch & Writing Experience







Security & Compatibility



User Friendly Experience



Remote-control Services

TR3DK Series

	Inch	86" / 75" / 65" / 55"	
Display	Native Resolution	3,840 x 2,160 (UHD)	
	Brightness (w/o Glass)	440 nit (Max.), 390 nit (Typ.)	
Touch	Multi-Touch Point	Max. 40 Points	
Connectivity	Input	HDMI (3, HDCP2.2), RGB (1, VGA), Audio (1), RS-232C (1), RJ45(1, LAN), USB3.0 Type A (4), USB2.0 Type A (1), USB Type-C (1, USB-PD, DP-Alt)	
	Output	HDMI (1), Audio Out (1, Optical 1(SPDIF)), Touch USB (2), RJ45(1, LAN)	

CREATIVE WHITEBOARD SOLUTION



Various Teaching Templates


LG CreateBoard offers a variety of educational templates and teaching tools such as a ruler, table, and sticky notes, allowing for active engagement by students and enabling intuitive classes. Editing images and videos becomes easy with LG CreateBoard, and created resources can be easily shared with others through QR codes.



Multi-touch

LG CreateBoard can simultaneously detect up to 40 points for multi-touch functionality. This creates a lifelike board touch experience, helping students easily become accustomed and truly engage in classes. This leads to the maximum concentration and organic engagement of students.

- * A max of 32 points are recognized in the Android environment, and a max of 40 points are detected in the Windows environment.
- * Up to 10 points can be recognized in the writing app.

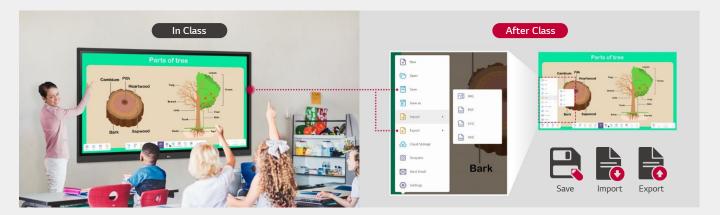

Easy to Save / Import / Export

LG CreateBoard includes simple import and export functionality. Resources can be saved and imported directly to and from Google Drive or OneDrive, and files can be imported from a USB drive (Users can browse resources saved on USB storage).


REMOTE MANAGEMENT SOLUTION



LG ConnectedCare DMS

LG ConnectedCare DMS is a cloud solution for remotely monitoring, controlling, and managing the status of LG CreateBoard installed in educational environments. This feature enables IT managers to operate and manage important resources on operating devices without physically visiting sites.

- * 'LG ConnectedCare DMS' needs to be purchased separately.
- * The availability of the 'LG ConnectedCare DMS' service differs by region, so please contact the LG sales representative in your region for more details.

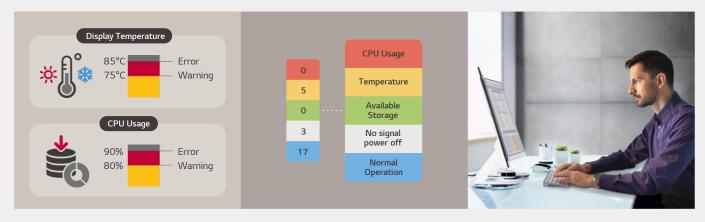

Threshold Settings

Users can set thresholds in eight categories including display temperature, memory usage, or signal, and can receive warning or error notifications based on their threshold settings.

Monitoring & Fault Diagnosis

An engineer can check the status in real-time and diagnose problems remotely. Also, the current status of issues can be categorized, allowing for easy viewing and quick responses.

Issue Management

Remote issue management can be carried out by the LG ConnectedCare DMS solution. This makes management safer and more efficient, facilitating the stable operation of the classroom.



Remote-control Services


Frequently used controls such as the power on/off, scheduling, brightness, and screen lock functions can be applied using a remote control. Content including images, videos, audio messages, or live streaming can be remotely shared with connected devices.



Broadcasting

In case of emergency situations such as a fire or a natural disaster, emergency warning alerts will be sent from the main system, which help teachers and students promptly take safety action. When the message is sent out to the device, LG CreateBoard interrupts the current display and sends out emergency messages along with warning sounds.


EASY CONNECTION & SHARING

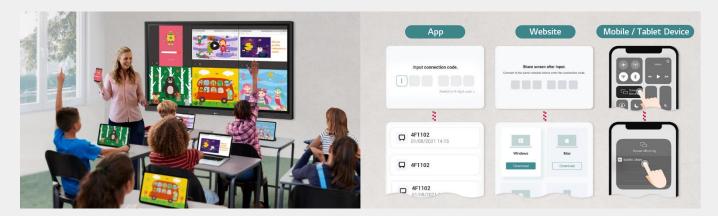

Wireless ScreenShare

LG CreateBoard Share enables users to show up to 9 shared screens or a file on a screen in real-time when the LG CreateBoard Share app is installed on the device. Also, files from the host can be easily sent to any devices connected to the LG CreateBoard Share app, and several quick controls by the host are available.

- * LG CreateBoard also supports app-less sharing for PC (via website) and mobile devices within the same network.
- * For a more stable connection, we recommend the installation of a dedicated app (LG CreateBoard Share).

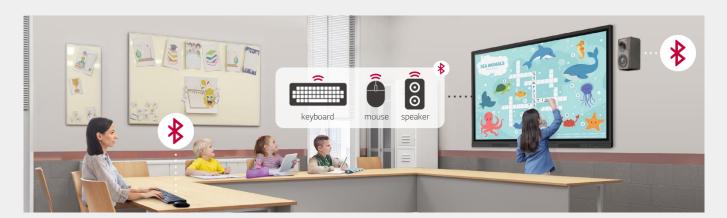

Bluetooth Connectivity

LG CreateBoard supports wireless Bluetooth connections to various devices such as a speaker, mouse, keyboard, etc. This is optimal for building a hybrid environment so that online and offline classes can proceed smoothly.



C-type Connection

USB-C connectivity simplifies connections which enables charging and sending data simultaneously over just one single cable.


* USB Type-C cables are sold separately.

OTHER FEATURES



QR Login for Easy Cloud Access

The QR code on the home screen reduces preparation time for class by enabling personal device verification. Users can sign up for a variety of apps on the LG CreateBoard including Google Drive and OneDrive with just one QR verification without any additional login process. Once a lesson is finished, users can simply click the Logout button to disconnect, thus the risk of a personal information leak is reduced.

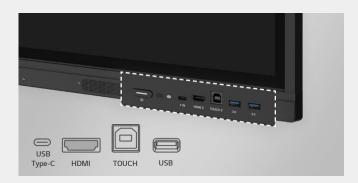

Front Connectivity Design


LG CreateBoard features front display ports and speakers which are ideal for both teachers and students, enabling content to be delivered easier with more immersive sound.



Smart Viewing


The Smart Viewing feature of LG CreateBoard enables efficient teaching. Two or more materials can be displayed on the same screen simultaneously without having to repeat Alt-tab, making teaching more convenient and efficient. Two materials can be displayed side by side (multi window mode), or one material can be overlaid on the other one (picture-in-picture mode).

- $\ensuremath{^{\star}}$ Multi window mode may not work for some apps.
- * PIP mode is available for the external source screen.

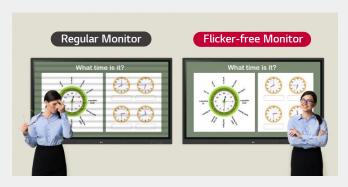

Advanced Eye-Care

LG CreateBoard has introduced a flicker-free function. With the reduced flickering of the monitor's backlight, users can use the device with more comfort even when using it for a long time.

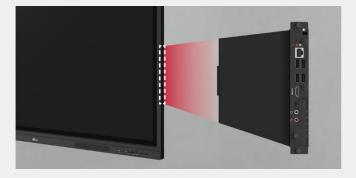

Built-in OPS Slot

LG CreateBoard supports OPS slots, allowing you to easily and conveniently mount OPS desktop at the back of the LG CreateBoard without the hassle of connecting to an external desktop, offering you more expanded functions.

* OPS : Open Pluggable Specification



Power Saving

When a device doesn't receive an external input signal for a specific amount of time set by the user, the device goes into standby mode. Devices can also be automatically turned on or off at specific time or day set by the user, which contributes to save energy.


OTHER FEATURES

SECURE FUNCTION



Screen Lock

Teachers can lock the screen using the Screen Lock function, and unlock it by entering a password. Users can set the Screen Lock in the Settings menu to protect the device from unidentified users.

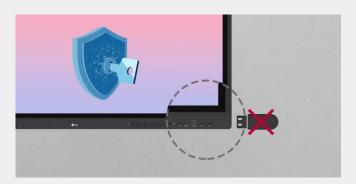

USB Lock Mode

USB Lock Mode is a security measure that helps prevent data from being copied to unauthorized devices, which is essential when being used in spaces where security is critical.



Secure Mode

LG CreateBoard supports Secure Mode that disables the LG CreateBoard Share function to prevent unauthorized content from being shown on various devices.




Auto-remove Files

Users can set LG CreateBoard to delete files regularly for enhanced security.


* All images in this datasheet are for illustrative purposes only

CONNECTIVITY

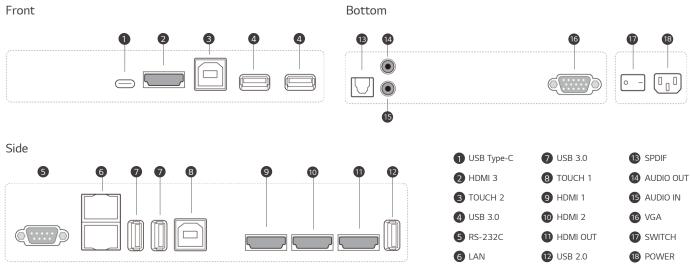

^{*} Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

DIMENSION (unit: mm)

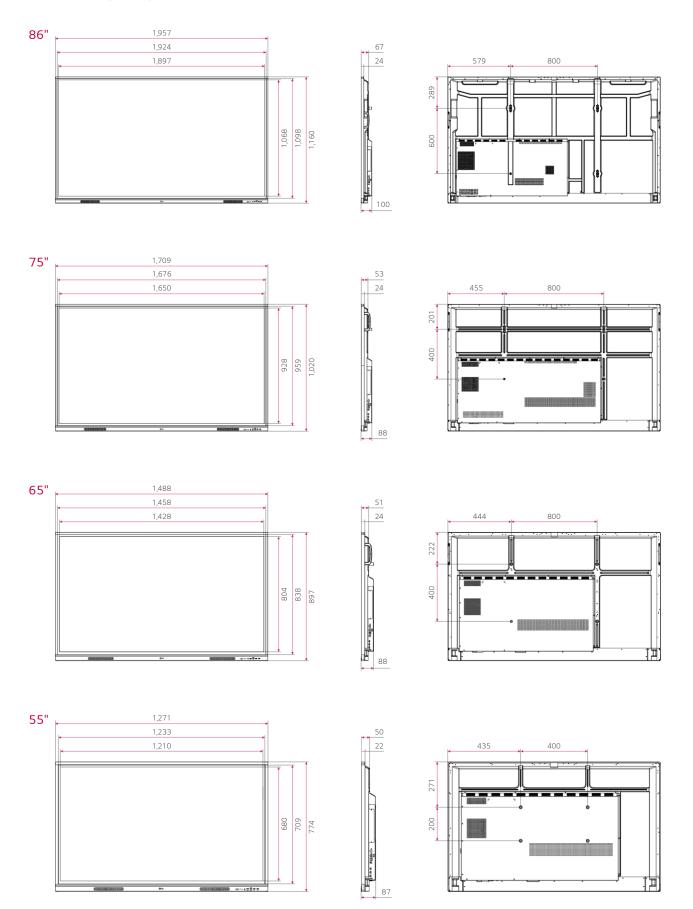

 $^{^{\}star}$ Dimensions may differ from the above image, so please contact LG sales team to verify before ordering.

SPECIFICATIONS

			86TR3DK	75TR3DK	65TR3DK	55TR3DK		
	Screen Size		86"	75"	65"	55"		
	Panel Technolo	gy	IPS	IPS	VA	VA		
	Back Light Type		Direct	Direct	Direct	Direct		
	Aspect Ratio		16:9	16:9	16:9	16:9		
	Native Resoluti	on	3,840 x 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 x 2,160 (UHD)		
	Refresh Rate		60 Hz	60 Hz	60 Hz	60 Hz		
Panel (Brightness		440 nit (w/o Glass Max.), 390 nit (w/o Glass Typ.)	440 nit (w/o Glass Max.), 390 nit (w/o Glass Typ.)	440 nit (w/o Glass Max.), 390 nit (w/o Glass Typ.)	440 nit (w/o Glass Max.), 390 nit (w/o Glass Typ.)		
	Contrast Ratio		1,200 : 1	1,200 : 1	1,200:1	1,200:1		
	Color Gamut		NTSC 68%	NTSC 72%	NTSC 72%	NTSC 72%		
		'LL ~ \/\	178 × 178	178 × 178	178 × 178	178 × 178		
	Viewing Angle (H x V) Color Depth		1.07 B (10 bit)	10 bit (8 bit + FRC)	10 bit (8 bit + FRC)	10 bit (8 bit + FRC)		
	Response Time		8 ms	8 ms	8 ms	8 ms		
	Surface Treatment (Haze)		28%	25%	25%	25%		
		lerit (riaze)						
	Lifetime	(1) (5)	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)		
		rs (Hours / Day)	16/7	16/7	16/7	16/7		
	Portrait / Lands	scape	No / Yes	No / Yes	No / Yes	No / Yes		
Connectivity	Input		HDMI (3, HDCP 2.2), RGB (VGA), Audio In, RS-232C In, RJ45 (LAN), USB 3.0 Type A (4), USB 2.0 Type A, USB Type C (USB-PD, DP-Alt)					
	Output			HDMI Out, Audio Out (1, Optical 1 (SPDIF)), Touch USB (2), RJ45 (LAN)			
	Bezel Color		Black	Black	Black	Black		
	Bezel Width (T	/R/L/B)	15 / 15 / 15 / 44 mm	15 / 15 / 15 / 44 mm	15 / 15 / 15 / 44 mm	18/18/18/45 mm		
Mechanical Specification Pac Mor	Weight (Head)		58.6 kg	47.3 kg	35.0 kg	26.1 kg		
	Packed Weight		75.9 kg	60.6 kg	44.7 kg	34.5 kg		
	Monitor Dimen	sion (W x H x D)	1,957 × 1,160 × 100 mm	1,709 x 1,020 x 88 mm	1,488.4 x 896.6 x 87.2 mm	1,271 x 774 x 87 mm		
	Carton Dimens (Box Outer Size	ions (W x H x D)	2,110 × 1,283 × 225 mm	1,863 x 1,140 x 225 mm	1,628 x 1,005 x 208 mm	1,401 x 859 x 220 mm		
	Handle	,	Yes	Yes	Yes	Yes		
		rd Mount Interface	800 × 600	800 × 400	600 × 400	400 x 200		
Key Feature		Internal Memory (32 GB)	, Built-In Wi-Fi (Slot Type), Auto Bright	ness Sensor, Power Indicator, webOS v	ver. (Android 11.0), Background Image ower (Smart Energy Saving, Wake on L			
Fi	Operation Tem	peration Temperature (°C) 0 to 40 0 to 40 0 to 40 0 to 40						
Environment Conditions	Operation Hum		10% to 90% RH	10% to 90% RH		10% to 90% RH		
Conditions	· ·	lidity			10% to 90% RH			
Power Pow	Power Supply		100-240 V ~, 50/60 Hz, 5.5 A	100-240 V ~, 50/60 Hz, 4.0 A	100-240 V ~, 50/60 Hz, 4.0 A	100-240 V ~, 50/60 Hz, 3.5 A		
	Power Type		Built-In Power	Built-In Power	Built-In Power	Built-In Power		
		Typ. / Max.	385 / 580 W	225 / 430 W	220 / 420 W	170 / 395 W		
	Power Consumption	BTU (British Thermal Unit)	1,314 BTU/Hr (Typ.), 1,979 BTU/Hr (Max.)	768 BTU/Hr (Typ.), 1,467 BTU/Hr (Max.)	751 BTU/Hr (Typ.), 1,433 BTU/Hr (Max.)	580 BTU/Hr (Typ.), 1,348 BTU/Hr (Max.)		
		DPM	. ,	, ,	, ,			
			0.5 W↓	0.5 W↓	0.5 W↓	0.5 W↓		
I	6 1	Power off	0.5 W↓	0.5 W↓	0.5 W↓	0.5 W↓		
Sound	Speaker		Yes (15 W x 2)	Yes (15 W x 2)	Yes (15 W x 2)	Yes (15 W x 2)		
Standard	Safety		CB / NRTL	CB / NRTL	CB / NRTL	CB / NRTL		
(Certification)	EMC		FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC		
,	ErP / Energy St		Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes		
OPS	OPS Type Compatible		Yes (Slot)	Yes (Slot)	Yes (Slot)	Yes (Slot)		
Compatibility	OPS Power Bui	lt In	Yes	Yes	Yes	Yes		
Software	LG Connected	are ¹⁾		Y	es			
Compatibility	LG ConnectedCare DMS ¹⁾		Yes					
Language		English, Denmark	Finnish, German, Korean, Norwegian, Polski, Portugues (Europe), Portugues (Brazil), Romanian, Spanish, Swedish, Hungarian, Thai					
•	Basic							
Accessory			Writ		rton Box, Remote Controller, Wi-Fi Mo	dule		
Accessory		ole Object Size for Touch		, ,	, ,	,		
Accessory	Availal	ole Object Size for Touch nse Time	Writ	ing Pen 🗴 2 Pcs, User Manual, QSG, Ca	rton Box, Remote Controller, Wi-Fi Mo	dule		
Accessory	Availal	nse Time	Writ Ø2 mm†	ing Pen 🗴 2 Pcs, User Manual, QSG, Ca Ø2 mm†	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm†	dule Ø2 mm↑		
Accessory	Availal Respoi Accura	nse Time	Writ Ø2 mm† ≤5 ms	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm↑ ≤5 ms	dule Ø2 mm↑ ≤5 ms		
	Availal Respoi Accura Interfa	nse Time	Writ Ø2 mm† ≤5 ms ±1 mm	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm† ≤5 ms ±1 mm	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm	dule Ø2 mm†		
Special	Availal Respon Accura Interfa Protec	nse Time acy ce	02 mm† ≤5 ms ±1 mm USB 2.0	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms ±1 mm USB 2.0	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm↑ ≤5 ms ±1 mm USB 2.0	dule Ø2 mm† ≤5 ms ±1 mm USB 2.0		
Special	Availal Respon Accura Interfa Protec Protec	nse Time acy ce tion Glass Thickness tion Glass Transmission	02 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88%	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88%	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88%	02 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88%		
Special	Touch Touch Touch Touch Touch Touch Touch Touch Protec Operate	nse Time cc tion Glass Thickness tion Glass Transmission ting System Support	02 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wine	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7 / 8 / 10 / Linux / Mac / Android	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I	02 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88%		
Special	Touch Touch Operat Multi 1	nse Time acy ce tion Glass Thickness tion Glass Transmission	### Writ ### Ø2 mm↑ ## ≤5 ms ## 1 mm ## USB 2.0 ## 3 T (Anti-Glare) ## 88% ## Wine ## Max. 40 Points	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7 / 8 / 10 / Linux / Mac / Android Max. 40 Points	rton Box, Remote Controller, Wi-Fi Mo ### ### ### ### #### #### ##########	### ### ### ### ### ### ### ### ### ##		
Special	Touch Protec Operat Multi 1	nse Time cc tion Glass Thickness tion Glass Transmission ting System Support	Writ Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wind Max. 40 Points Quad Core A55	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7 / 8 / 10 / Linux / Mac / Android Max. 40 Points Quad Core A55	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I Max. 40 Points Quad Core A55	dule ### @2 mm ### s5 ms ### mm ### USB 2.0 ### 3 T (Anti-Glare) ### 88% ### dac) ### Max. 40 Points Quad Core A55		
Special	Availat	nse Time icy ce tion Glass Thickness tion Glass Transmission ing System Support ouch Point	Writ Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wind Max. 40 Points Quad Core A55 Mali GS2MP2	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7 / 8 / 10 / Linux / Mac / Android Max. 40 Points Quad Core A55 Mali GS2MP2	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I Max. 40 Points Quad Core A55 Mali GS2MP2	dule Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Mac) Max. 40 Points Quad Core A55 Mali G52MP2		
Special	Touch Frotec Operat Multi 1 SoC GPU Internal	nse Time acy ce tion Glass Thickness tion Glass Transmission ing System Support ouch Point Storage	Writ Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wine Max. 40 Points Quad Core A55 Mali G52MP2 32 GB	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7 / 8 / 10 / Linux / Mac / Android Max. 40 Points Quad Core A55 Mali G52MP2 32 GB	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I Max. 40 Points Quad Core A55 Mali G52MP2 32 GB	dule ### ### ### ### #### ###############		
Special Feature	Touch Frotec Operat Multi 1 SoC GPU Internal Memory	nse Time icy ce tion Glass Thickness tion Glass Transmission ing System Support ouch Point	Writ Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wine Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7/8/10/Linux / Mac / Android Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I Max 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB	dule ### ### ### ### #### ###############		
Special Feature	Touch	nse Time acy ce tion Glass Thickness tion Glass Transmission ing System Support ouch Point Storage	Writ Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wind Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB 802.11a/b/g/n/ac/ax (Wi-Fi 6)	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm↑ ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7 / 8 / 10 / Linux / Mac / Android Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB 802.11a/b/g/n/ac/ax (Wi-Fi 6)	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB 802.11a/b/g/n/ac/ax (Wi-Fi 6)	dule ### ### ### ### #### ###############		
Special Feature	Touch Frotec Operat Multi 1 SoC GPU Internal Memory	nse Time acy ce tion Glass Thickness tion Glass Transmission ing System Support ouch Point Storage	Writ Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% Wine Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB	ing Pen x 2 Pcs, User Manual, QSG, Ca Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% dows 7/8/10/Linux / Mac / Android Max. 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB	rton Box, Remote Controller, Wi-Fi Mo Ø2 mm† ≤5 ms ±1 mm USB 2.0 3 T (Anti-Glare) 88% (Supports one point touch on Linux / I Max 40 Points Quad Core A55 Mali G52MP2 32 GB 4 GB	dule ### ### ### ### #### #### ##########		

 $^{^{1)}\}mbox{\it The}$ availability can differ by region.

^{*} Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.







